


Generating of Waveforms based on Arduino

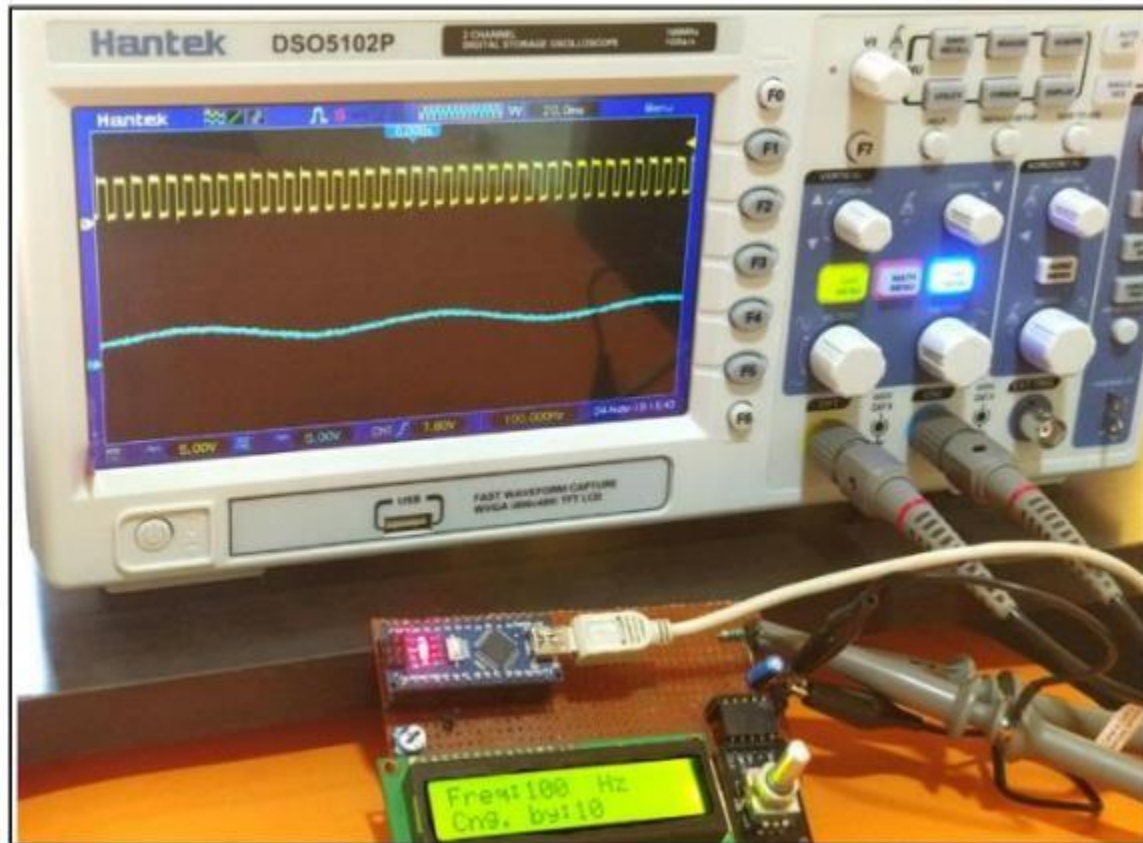

1. Square Wave

The Arduino microcontroller can be used to generate frequency. By using the delay function, the Arduino microcontroller generates a frequency depending on the delay value.

Example 1:


We want to generate a frequency of 1 kHz with a 50% duty cycle on pin 2 and 3, but one is the opposite of the other.

```
int OUT_PIN1=2;
int OUT_PIN2=3;

// the setup function runs once when you press reset or power the board
void setup() {
    // initialize digital pin LED_BUILTIN as an output.
    pinMode(OUT_PIN1, OUTPUT);
```



```
pinMode(OUT_PIN2, OUTPUT);  
  
}  
  
// the loop function runs over and over again forever  
  
void loop() {  
  
    digitalWrite(OUT_PIN1, HIGH); // turn the LED on (HIGH is the voltage level)  
    digitalWrite(OUT_PIN2, LOW); // turn the LED on (LOW is the voltage level)  
    delayMicroseconds(500); // wait for 500  $\mu$ s  
    digitalWrite(OUT_PIN1, LOW); // turn the LED off by making the voltage LOW  
    digitalWrite(OUT_PIN2, HIGH); // turn the LED off by making the voltage LOW  
    delayMicroseconds(500); // wait for 500  $\mu$ s  
  
}
```

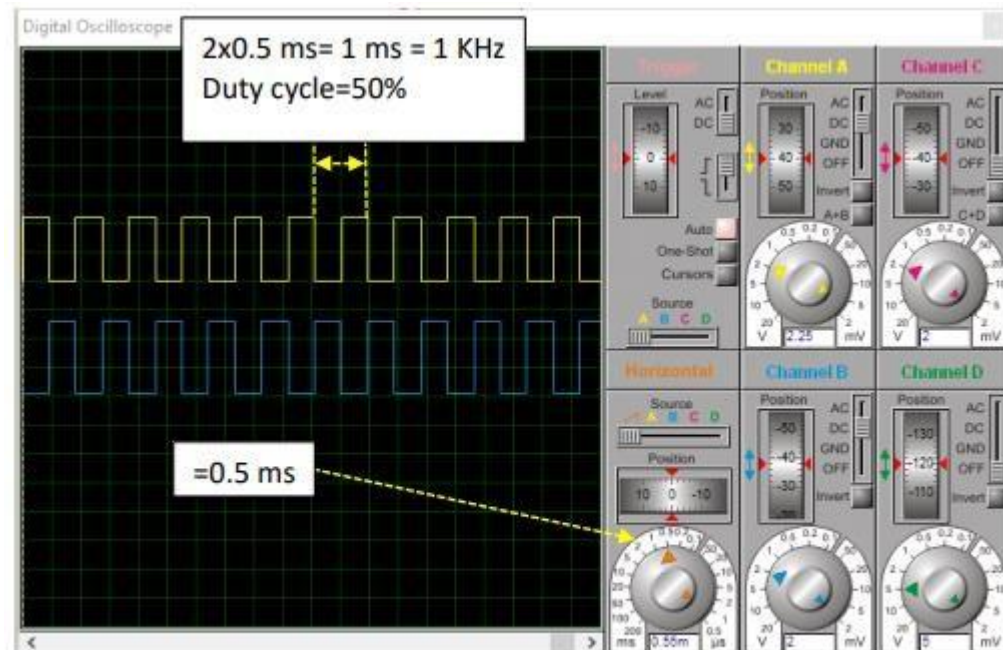

Frequency= 1 KHz, Duty cycle=50%

Example 2:

We want to generate a frequency of 10 kHz with a 50% duty cycle on pin 2.

```
int OUT_PIN=2;
```

```
// the setup function runs once when you press reset or power the board
```

```
void setup() {
```

```
    // initialize digital pin LED_BUILTIN as an output.
```

```
    pinMode(OUT_PIN, OUTPUT);
```

```
}
```

```
// the loop function runs over and over again forever
```

```
void loop() {
```


```
    digitalWrite(OUT_PIN, HIGH); // turn the LED on (HIGH is the voltage level)
```

```
    delayMicroseconds(50); // wait for 50 μs
```

```
    digitalWrite(OUT_PIN, LOW); // turn the LED off by making the voltage LOW
```

```
    delayMicroseconds(50); // wait for 50 μs
```

```
}
```

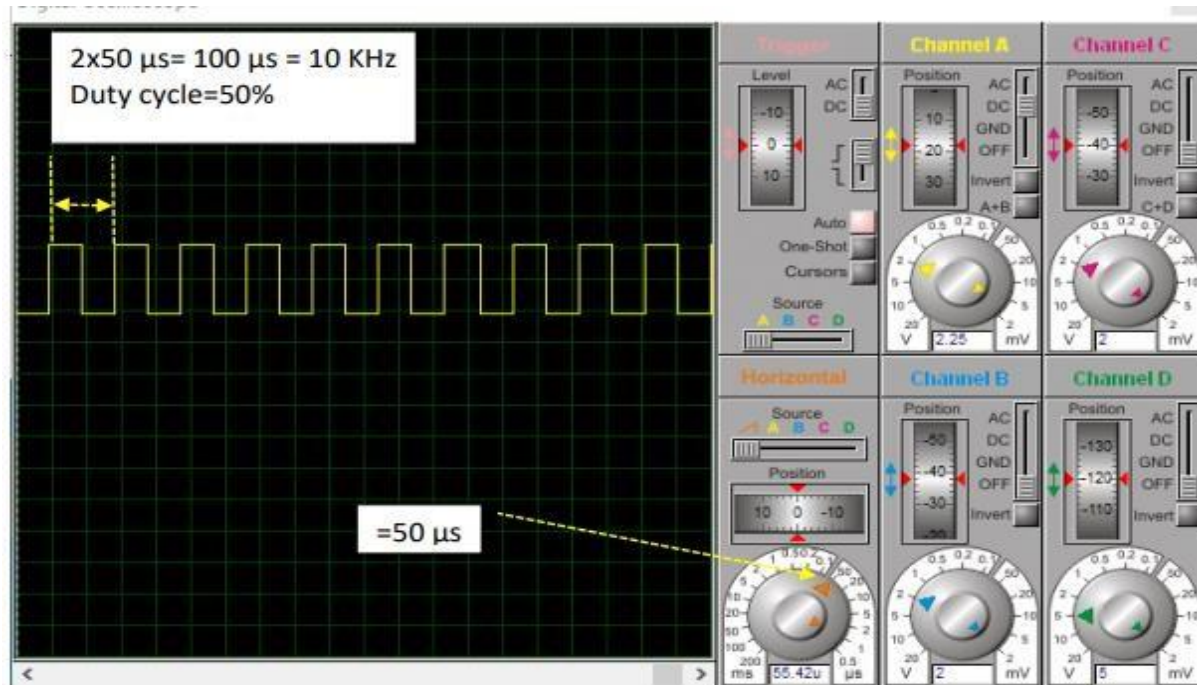

Frequency= 10 KHz, Duty cycle=50%



Example 4:

We want to generate a frequency of 1 Hz with a 50% duty cycle on pin 4.

```
int OUT_PIN=4;
```

```
// the setup function runs once when you press reset or power the board
```

```
void setup() {
```

```
  pinMode(OUT_PIN, OUTPUT);
```

```
}
```

```
void loop() {
```


```
  digitalWrite(OUT_PIN, HIGH); // turn the LED on (HIGH is the voltage level)
```

```
  delay(500); // wait for 500 ms
```

```
  digitalWrite(OUT_PIN, LOW); // turn the LED off by making the voltage LOW
```

```
  delay(500); // wait for 500 ms
```

```
}
```

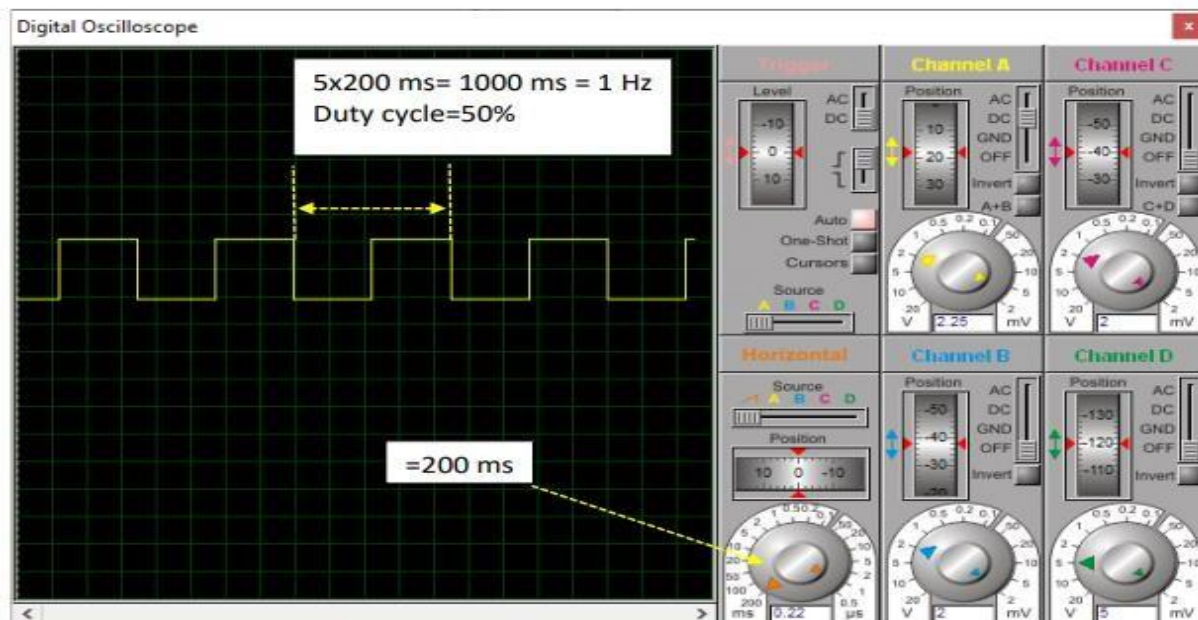

Frequency= 1 Hz, Duty cycle=50%



Example 5:

We want to generate a frequency of 100 Hz with 80% duty cycle on pin 6.

```
int OUT_PIN=6;
```

```
// the setup function runs once when you press reset or power the board
```

```
void setup() {
```

```
// initialize digital pin LED_BUILTIN as an output.
```

```
pinMode(OUT_PIN, OUTPUT);
```

```
}
```

```
void loop() {
```


```
digitalWrite(OUT_PIN, HIGH); // turn the LED on (HIGH is the voltage level)
```

```
delay(8); // wait for 8 ms
```

```
digitalWrite(OUT_PIN, LOW); // turn the LED off by making the voltage LOW
```

```
delay(2); // wait for 2 ms
```

```
}
```

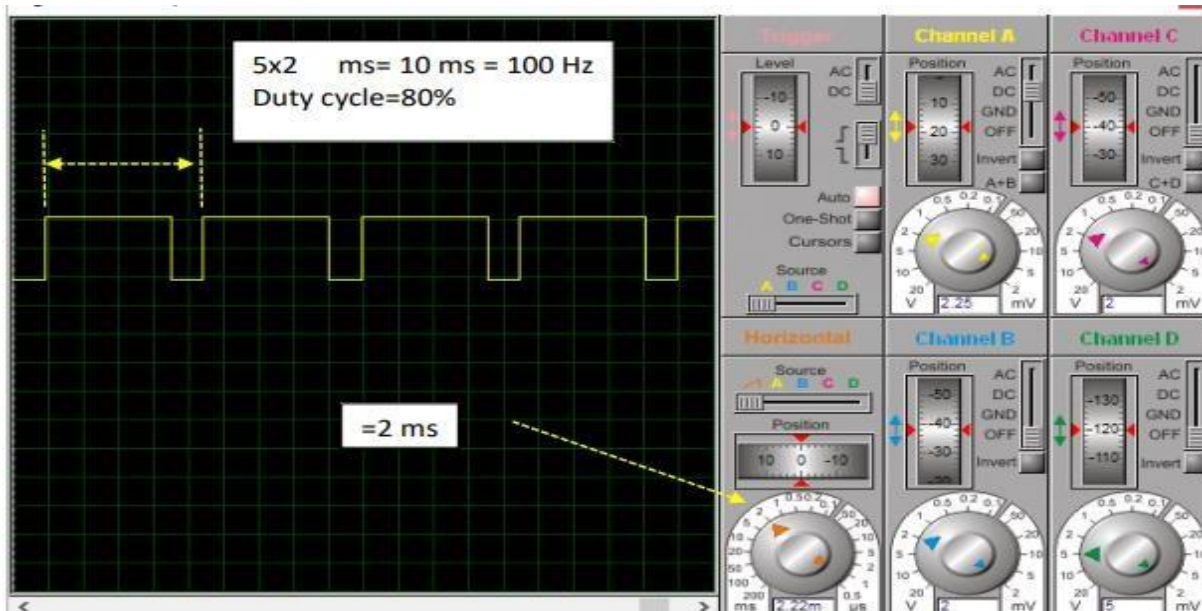


Frequency= 100 Hz, Duty cycle=80%



Example 6:

We want to generate a frequency of 1 KHz with 20% duty cycle on pin 10.

```
int OUT_PIN=10;  
  
// the setup function runs once when you press reset or power the board  
void setup() {  
    // initialize digital pin LED_BUILTIN as an output.  
    pinMode(OUT_PIN, OUTPUT);  
}  
  
void loop() {  
    digitalWrite(OUT_PIN, HIGH); // turn the LED on (HIGH is the voltage level)  
    delayMicroseconds (200); // wait for 200 µs  
    digitalWrite(OUT_PIN, LOW); // turn the LED off by making the voltage LOW  
    delayMicroseconds (800); // wait for 800 µs  
}
```

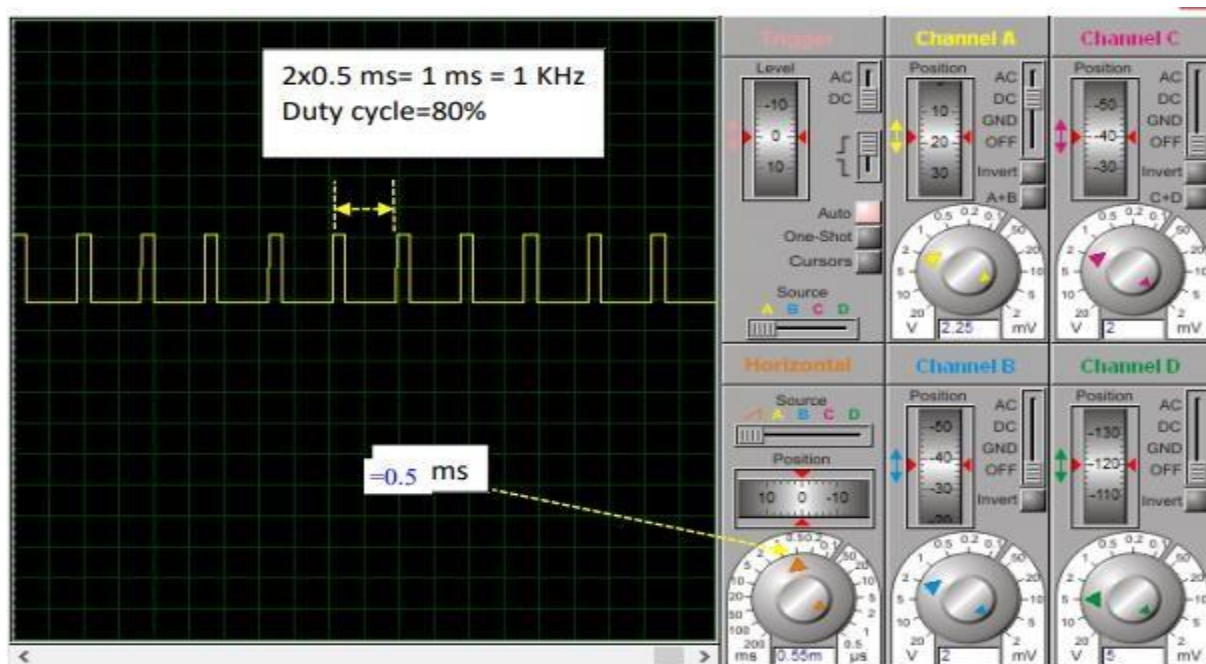



2. Ramp Wave

Example 1:

We want to generate a ramp signal with a frequency of 100 kHz.

Solution


100 KHz= 10 μ s

The code as follows:

```
void setup() {  
  Serial.begin(9600);  
}  
  
void loop() {  
  // First loop_go up  
  for (int i=0; i<100; i++){  
    Serial.println(i);  
    delayMicroseconds(0.1);  
  }  
}
```

```
1 void setup() {  
2   Serial.begin(9600);  
3 }  
4 void loop() {  
5   // First loop_go up  
6   for (int i=0; i<100; i++){  
7     Serial.println(i);  
8     delayMicroseconds(0.1);  
9   }  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20
```

$0.1 \mu s \times 100 = 10 \mu s$
 $= 100 \text{ KHz}$

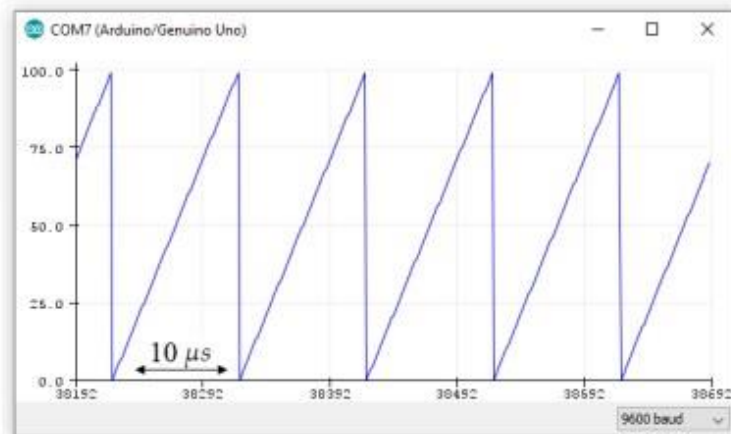



3. Sawtooth

Example:

We want to generate a sawtooth signal with a frequency of 100 kHz.

Solution

100 KHz= 10 μ s

The code as follows:

```
void setup() {  
  Serial.begin(9600);  
}  
  
void loop() {  
  // First loop_go up  
  // for (int i=0; i<100; i++){  
  // Serial.println(i);  
  // delayMicroseconds(0.1);  
  // }  
  /// Second loop_flat  
  // for (int i=0; i<100; i++){  
  // Serial.println(100);  
  // delayMicroseconds(0.2);  
  // }  
  //Third loop_go down  
  for (int i=100; i>0; i--){  
    Serial.println(i);  
    delayMicroseconds(0.1);  
  }  
}
```

```
1 void setup() {  
2   Serial.begin(9600);  
3 }  
4 void loop() {  
5   for (int i=100; i>0; i--){  
6     Serial.println(i);  
7     delayMicroseconds(0.1);  
8   }  
9 }  
10  
11  
12  
13  
14  
15  
16  
17  
18
```

$0.1 \mu\text{s} \times 100 = 10 \mu\text{s}$
 $= 100 \text{ KHz}$

