



Al-Mustaqbal University
College of Science
Intelligent Medical System Department



جامعة المستقبل
AL MUSTAQBAL UNIVERSITY

كلية العلوم قسم الأنظمة الطبية الذكائية

المحاضرة الاولى

Digital Signal Processing

المادة : DSP
المرحلة : الثالثة
اسم الاستاذ: م.م. ريام ثائر احمد



Introduction to DSP

Digital Signal Processing (DSP) is used to process the analysis of digital signals to retrieve essential information or improve specific features through algorithms and techniques that are essential for applications starting from telecommunications and audio processing to medical imaging and control systems. The general block diagram of DSP is shown below:

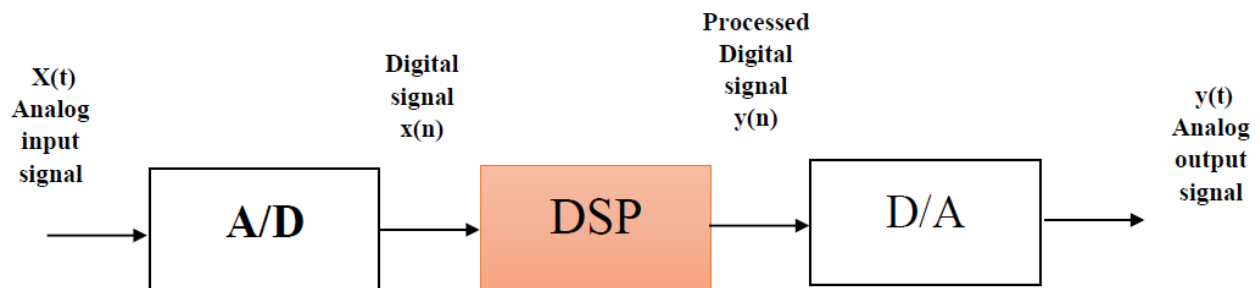


Fig.1 Block diagram of Digital Signal Processing

In real life most of the signals are analog in nature, to implement DSP on computer some fundamental steps are followed:

- An analog signal is sampled at a regularly spaced time interval to form a sequence of the signal amplitude.
- The sampled sequence of the analog magnitude is converted into a binary number.
- The sampling and conversion are done with an analog to digital converter (ADC).
- Perform some operations (Processing) on the digitized analog signal to get an output value.



- Convert the processed output value into an analog signal using analog to digital Converter (ADC).

DSP has a number of advantages over analog signal processing:

Advantages: -

- 1- More flexible.
- 2- Often easier system upgrade.
- 3- Data easily stored in memory.
- 4- Better control over accuracy requirements.
- 5- DSP is less susceptible to noise and power supply disturbances than ASP.

Limitations:


- 1- A/D & signal processors speed: wide-band signals still difficult to treat (real-time systems).
- 2- Cost/complexity added by A/D and D/A conversion.

DSP Applications:

The figure below shows the DSP applications. Many more areas are increasingly being explored by engineers and scientists. Applications of DSP techniques will continue to have profound impacts and improve our lives.



Al-Mustaqbal University
College of Science
Intelligent Medical System Department

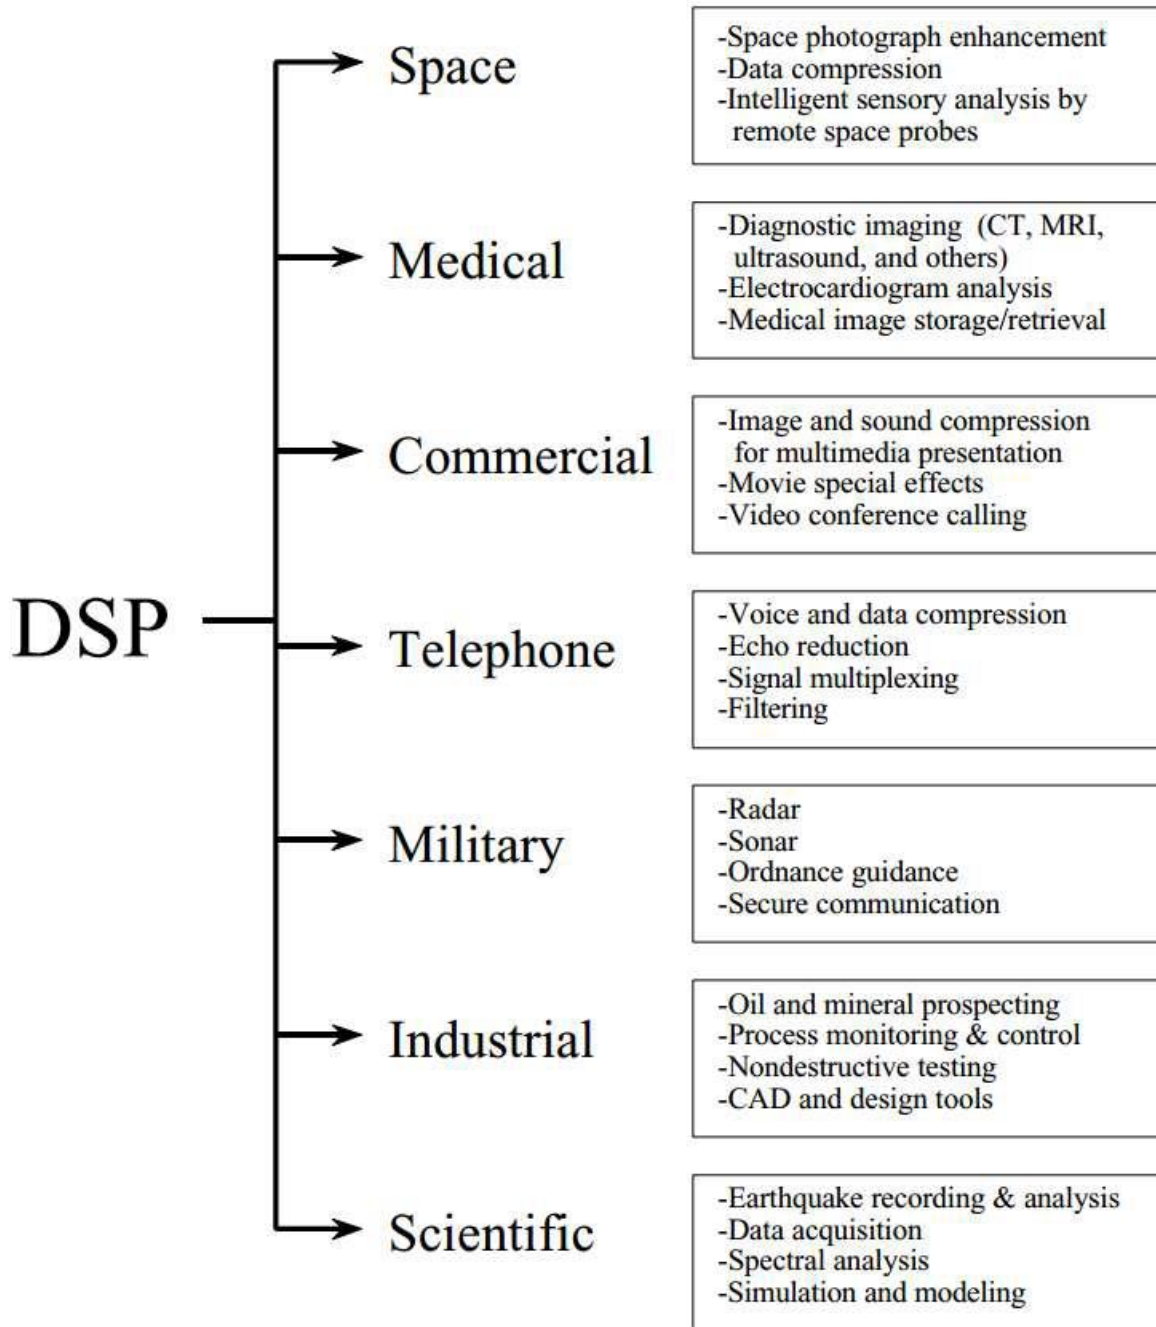



Signal-Definition

A Signal is the function of one or more independent variables that carries some information to represent a physical phenomenon.

Note - Any unwanted signal interfering with the main signal is termed as noise. So, noise is also a signal but unwanted.

According to their representation and processing, signals can be classified into various categories details of which are discussed below.

- **Continuous-Time Signals.**
- **Discrete-Time signals.**

Continuous-Time Signals:

Continuous-time signals are defined along a continuum of time and are thus, represented by a continuous independent variable. Continuous-time signals are often referred to as analog signals. This type of signal shows continuity both in amplitude and time. These will have values at each instant of time. Sine and cosine functions are the best examples of Continuous-time signals.

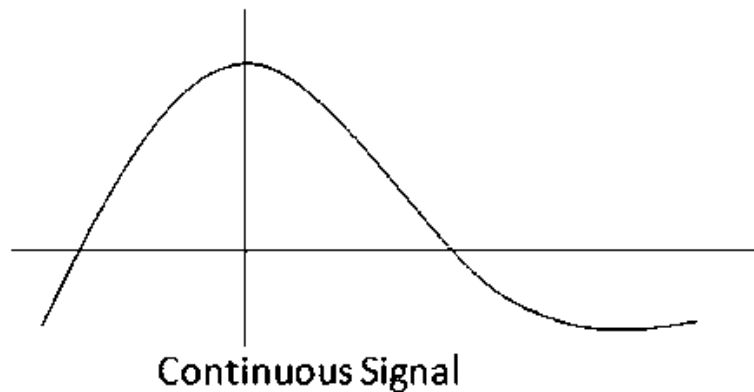


Fig.2 Continuous-time signals

Discrete-Time signals

A discrete-time signal is a function of an integer-valued variable, n , that is denoted by $x(n)$. Every independent variable has a distinct value. Thus, they are represented as a sequence of numbers.

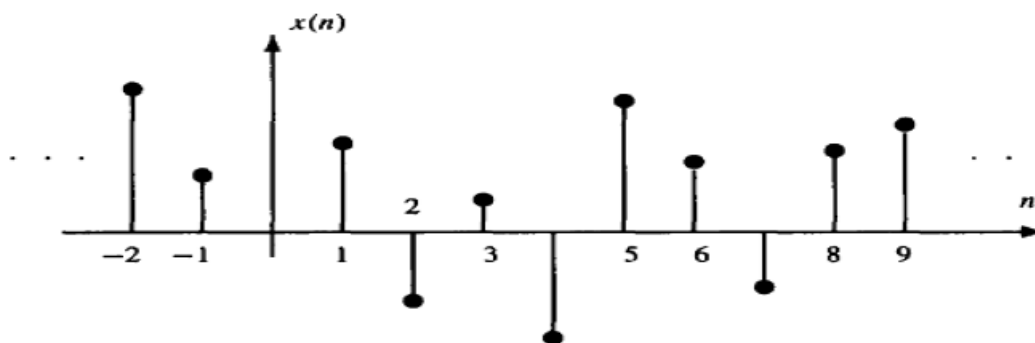


Fig.2 Discrete -time signals

The figure above depicts a discrete signal's discrete amplitude characteristic over a period of time. Mathematically, these types of signals can be formularized as:



$$x = \{x[n]\}, -\infty < n < \infty$$

Where, n is an integer.

It is a sequence of numbers x , where n^{th} number in the sequence is represented as $x[n]$.

Classification of DT Signals

Discrete time signals can be classified according to the conditions or operations on the signals.


a- Even and Odd Signals

b- Periodic and Non-Periodic Signals

a- Even Signals

A signal is said to be even or symmetric if it satisfies the following condition;

$$(-n) = (n)$$

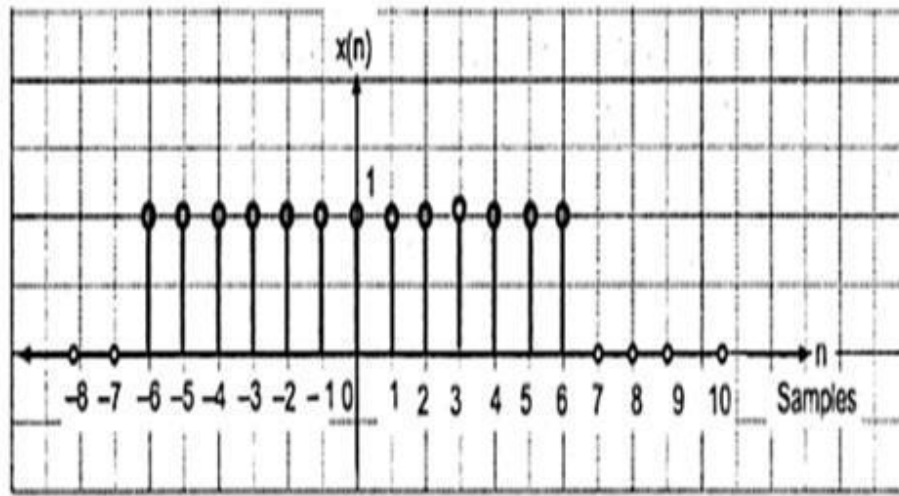

Here, we can see that $x(-1)=x(1)$, $x(-2)=x(2)$ and $x(-n)=x(n)$. Thus, it is an even signal.

Example: Find whether the signal $x(n) = n^2 + n^4$ are even or odd.

Solution:

$$(-n) = (n)$$


$$\begin{aligned} x(-n) &= (-n)^2 + (-n)^4 \\ &= n^2 + n^4 \end{aligned}$$

The signal is **even** because $(-n) = (n)$

b- Odd Signal

A signal is said to be odd if it satisfies the following condition;

$$(-n) = -(n)$$

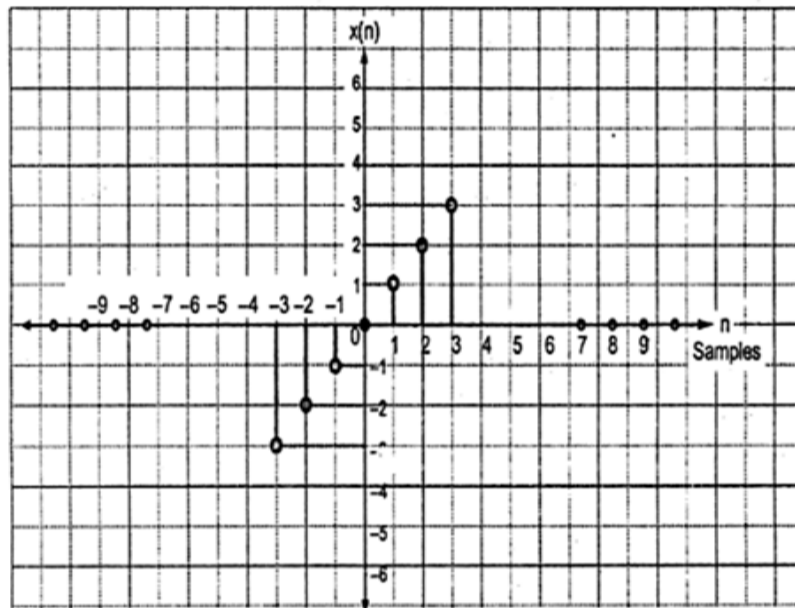

From the figure, we can see that $x(1)=-x(-1)$, $x(2)=-x(-2)$ and $x(n)=-x(-n)$. Hence, it is an odd as well as anti-symmetric signal.

Example: Find whether the signal $x(n) = n^3$ are even or odd.

Solution:

$$(-n) = -(n)$$

$$x(-n) = (-n)^3$$

$$= -n^3$$

The signal is **odd** because $(-n) = -(n)$




Periodic and Non-Periodic Signals

A signal (**t**) is considered to be periodic signal when it is repeated over cycle of time or regular interval of time. This means periodic signal repeats its pattern over a period. The function (**n**) can be periodic if it satisfies following equation.

$$x(n) = x(n+N)$$

There are four types (waveform) of periodic signal such as:

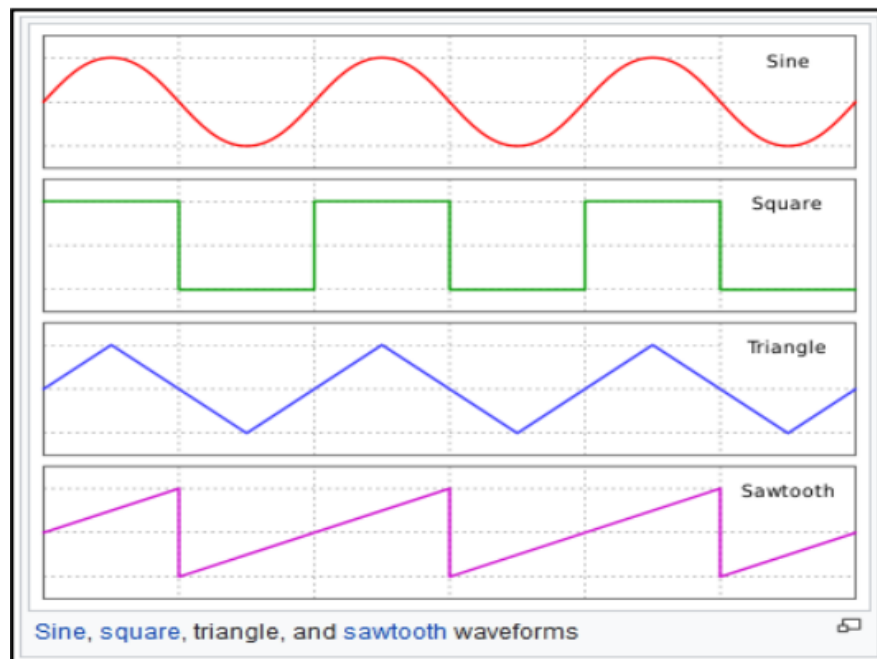

Example:

- a) Find whether the signal $x(n) = \cos 0.01\pi n$ are Periodic or Non-Periodic.

Solution:



$$x(n) = \cos 0.01\pi n$$

We have the condition:

$$x(n) = x(n + N)$$

So

$$x(n) = \cos 0.01\pi(n + N)$$

Where $\omega_0 = 2\pi f$

$$\begin{aligned} f &= \frac{\omega_0}{2\pi} \\ &= \frac{0.01\pi}{2\pi} = \frac{1}{200} = \frac{K}{N} \end{aligned}$$

$$N=200$$

So the signal is **Periodic**.

$$\text{b) } X(n) = \cos \frac{n}{8} \cos \frac{\pi n}{8}$$

Sol/

$$w_1 = \frac{1}{8}, \quad w_2 = \frac{\pi}{8}$$

$$w_1 = 2\pi f_1 = \frac{1}{16\pi}, \quad w_1 \text{ non periodic}$$

$$w_2 = 2\pi f_2 = \frac{1}{16}, \quad w_2 \text{ is a periodic}$$

So the signal is non periodic.



H.W

1- Find whether the signal are even or odd:

a- $X(n) = \sin 4t$

b- $X(n) = \cos 3t$

2- Find whether the signal are periodic or not:

a- $x(n) = \sin 3n$

b- $x(n) = (-1)^n$

c- $X(n) = \cos(0.3\pi n + \frac{\pi}{4})$