




Lec. 1

أنظمة الأرقام / Number systems

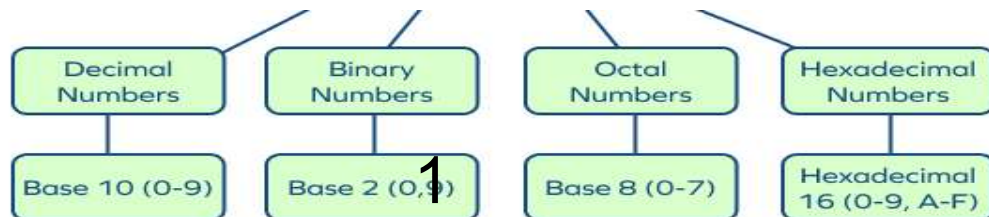

1. **The Binary Number System**: has the base 2 and uses only 2 symbols or digits (0, 1) to form other numbers. نظام الأرقام الثنائية.
2. **The Octal Number System** has the base-8 and uses only 8 symbols or digits (0, 1, 2, 3, 4, 5, 6, 7) used to form other numbers. نظام الأرقام الثماني.
3. **The Decimal Number System** : The most commonly used number, which has base 10 and uses only 10 symbols or digits (0, 1, 2, 3, 4, 5, 6, 7, 8, 9) to form other numbers. نظام الأرقام العشري.
4. **The Hexadecimal Number System**: has base 16 and uses only 16 symbols or digits (0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F) to form other numbers. نظام الأرقام الست عشري.

The main advantage of using the **Binary and octal** number system are that it uses fewer digits than the decimal and hexadecimal number system. So, it has fewer calculations and thereby less calculation errors.

الميزة الرئيسية لاستخدام نظام الأرقام الثنائي والثماني هي أنه يستخدم أرقامًا أقل من نظام الأرقام العشري والست عشري. لذا، فهي تحتوي على عدد أقل من الحسابات وبالتالي أخطاء حسابية أقل.



Table to compare number systems

10 ³	10 ²	10 ¹	10 ⁰	8 ³	8 ²	8 ¹	8 ⁰	2 ⁹	2 ⁸	2 ⁷	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰	16 ²	16 ¹	16 ⁰
Decimal				octal				Binary										hexadecimal		
0000				0000				0	0	0	0	0	0	0	0	0	0	000		
0001				0001				0	0	0	0	0	0	0	0	0	1	001		
0002				0002				0	0	0	0	0	0	0	0	1	0	002		
0003				0003				0	0	0	0	0	0	0	0	1	1	003		
0004				0004				0	0	0	0	0	0	0	1	0	0	004		
0005				0005				0	0	0	0	0	0	0	1	0	1	005		
0006				0006				0	0	0	0	0	0	0	1	1	0	006		
0007				0007				0	0	0	0	0	0	0	1	1	1	007		
0008				0010				0	0	0	0	0	0	1	0	0	0	008		
0009				0011				0	0	0	0	0	0	1	0	0	1	009		
0010				0012				0	0	0	0	0	0	1	0	1	0	00A		
0011				0013				0	0	0	0	0	0	1	0	1	1	00B		
0012				0014				0	0	0	0	0	0	1	1	0	0	00C		
0013				0015				0	0	0	0	0	0	1	1	0	1	00D		
0014				0016				0	0	0	0	0	0	1	1	1	0	00E		
0015				0017				0	0	0	0	0	0	1	1	1	1	00F		
0016				0020				0	0	0	0	0	1	0	0	0	0	010		
0017				0021				0	0	0	0	0	1	0	0	0	1	011		
0018				0022				0	0	0	0	0	1	0	0	1	0	012		
0019				0023				0	0	0	0	0	1	0	0	1	1	013		
0020				0024				0	0	0	0	0	1	0	1	0	0	014		
0021				0025				0	0	0	0	0	1	0	1	0	1	015		
0022				0026				0	0	0	0	0	1	0	1	1	0	016		
0023				0027				0	0	0	0	0	1	0	1	1	1	017		
0024				0030				0	0	0	0	0	1	1	0	0	0	018		
0025				0031				0	0	0	0	0	1	1	0	0	1	019		
0026				0032				0	0	0	0	0	1	1	0	1	0	01A		
0027				0033				0	0	0	0	0	1	1	0	1	1	01B		
0028				0034				0	0	0	0	0	1	1	1	0	0	01C		
0029				0035				0	0	0	0	0	1	1	1	0	1	01D		
0030				0036				0	0	0	0	0	1	1	1	1	0	01E		
0031				0037				0	0	0	0	0	1	1	1	1	1	01F		
0032				0040				0	0	0	0	1	0	0	0	0	0	020		
:				:				:	:	:	:	:	:	:	:	:	:	:		
0266				0412				0	1	0	0	0	0	1	0	1	0	10A		
0267				0413				0	1	0	0	0	0	1	0	1	1	10B		
:				:				:	:	:	:	:	:	:	:	:	:	:		
1022				1776				1	1	1	1	1	1	1	1	1	0	3FE		
1023				1777				1	1	1	1	1	1	1	1	1	1	3FF		



Frequently Asked Questions on Binary Number System

Q1) What is a binary number system?

A number system where a number is represented by using only two digits (0 and 1) with a base 2 is called a binary number system. For example, 1001_2 is a binary number.

Q2) What is a bit?

A bit is a single digit in the binary number. For example, 101 is three-bit binary numbers, where 1, 0 and 1 are the bits.

Q3) How to convert a decimal number into a binary number? Give an example.

To convert a decimal number into its equivalent binary number, we divide the decimal number by 2 each time, till we get 0 as a dividend. Let us take an example to convert 13_{10} into a binary number.

13	÷	2:	6	and	remainder	1
6	÷	2:	3	and	remainder	0
3	÷	2:	1	and	remainder	1
1	÷	2:	0	and	remainder	1

Now we take the bits from the last remainder to first remainder, i.e.(MSB to LSB). Hence, $13_{10} = 1101_2$



Q4) What is the use of binary numbers?

Binary numbers are commonly used in computer architecture. Since the computer understands only the language of two digits 0's and 1's, therefore the programming is done using a binary number system.

Q5) What is the value of 163 in binary?

The value of 163 in binary is 10100011.

Q6) How is 200 represented in binary?

200 is the decimal number. The binary form of 200 is 11001000₂.